


SIZE: **60X30**

SURFACE: **STRUCTURED**

SLIP RESISTANCE: **R11**

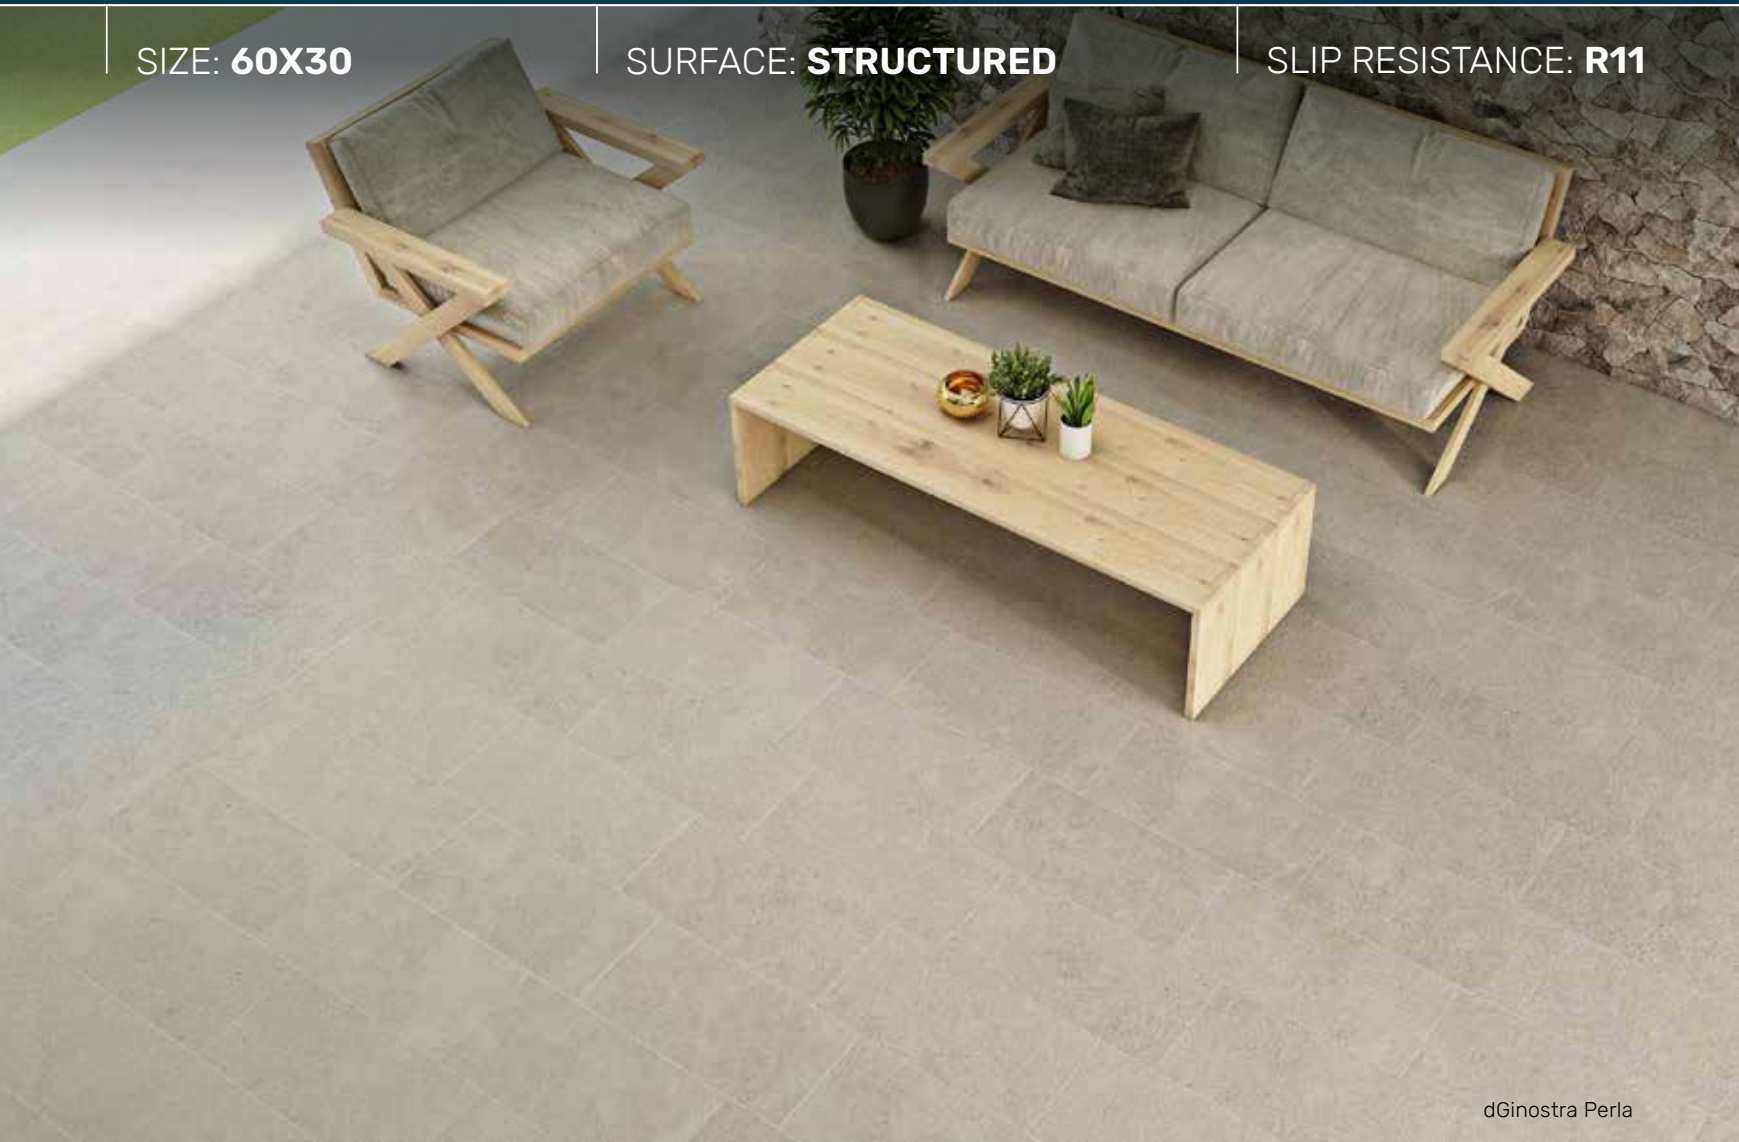

dGinostra Perla



GT635523R
dGinostra Perla



GT635524R
dGinostra Grigio



GT635525R
dGinostra Charcoal



V2



Mild random design (15)

SHADE VARIATIONS

Shade variations are the characteristic of the tile that deliberate and visible differences in graphics and colour hue. Digital Tecnica technology creates stunning porcelain tiles with hyper-realistic surface tones, markings and textures which mimic a range of natural materials including; stone, timber, terracotta, cement, mosaic, marble and more.

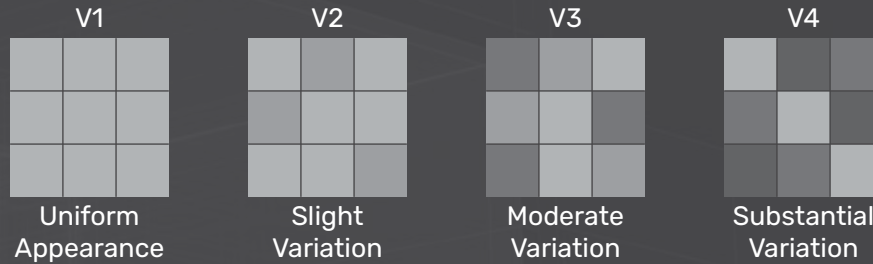


V1 (Uniform Appearance)
Differences among pieces from the same production run are minimal.

Olvera Bright
60x60



V3 (Moderate Variation)
Amount and intensity of colors on each piece may vary significantly.

dRajasthan Sand
30x30



V2 (Slight Variation)
Clearly distinguishable differences in texture and/or pattern within similar colors.

dSalvadori White
60x60



V4 (Substantial Variation)
Random color differences each tile, so that one tile may have totally different colors from other tiles.

dDutch Blue
60x60

R-RATING SLIP RESISTANT

Floor tiles these days are given an anti slip rating. This rating comes in the form of an 'R' value (Ramp test) with a scale from R9 to R13 (R9 having the least slip resistance and R13 the highest slip resistance).

CLASSIFICATION	R9	R10	R11	R12	R13
SLIP ANGLE	6-9 DEGREE	10-18 DEGREE	19-26 DEGREE	27-34 DEGREE	>35 DEGREE
WET SLIP RISK	HIGH RISK	MODERATE	MODERATE	LOW RISK	LOW RISK
AREA OF USE	DRY AREA	OCCASIONAL WETNESS	OUTDOOR ENVIROMENT	WET/OUTDOOR ENVIROMENT	VERY WET COMMERCIAL AREA

- **R9** : For internal dry area usage.
- **R10** : For internal area with occasional spill or wetness (need constant cleaning/drying) : kitchens and bathrooms.
- **R11** : For internal usage with constant spill or wetness (require continous cleaning and drying effort).
- **R12** : For external usage (works in dry and wet situation with cautions).
- **R13** : For external usage with other contaminant (such as oil).

TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	TEST METHOD OR AS PER NORM	ISO 13006 REQUIREMENT	ROMANGRANIT
Length and Width	ISO 10545-2	± 0.6%	± 0.10%
Side Straightness	ISO 10545-2	± 0.5%	± 0.10%
Rectangularity	ISO 10545-2	± 0.6%	± 0.10%
Centre & Edge Curvature	ISO 10545-2	± 0.5%	- 0.15% to + 0.25%
Warpage	ISO 10545-2	± 0.5%	± 0.25%
Thickness	ISO 10545-2	± 5.0%	± 4.0%
Water Absorption	ISO 10545-3	Group B1a ≤ 0.5%	< 0.25%
Modulus of Rupture	ISO 10545-4	Group B1a 35 Ind. Min. 32 N/mm ²	≥ 40 N/mm ²
Crazing Resistance	ISO 10545-11	Required	Resistant
Chemical Resistance	ISO 10545-13	Minimum Class GB	Minimum Class GB
Stain Resistance	ISO 10545-14	Minimum Class III	Minimum Class IV
Abrasion Resistance	ISO 10545-7	Group I to V	Group III to V

- The governing sizes and weights are subject to usual variations expected of fired ceramic productions.
- Slight variations of shades/colours and surface finishes are inherent due to the nature of ceramic tile production process.

STANDARD PACKING DATA

FACTORY	TYPE	SIZE	PIECES/BOX	APPROX. SQM/BOX	APPROX. WEIGHT KG/BOX	BOXES/PALLET	PALLET/CONTAINER	APPROX. WEIGHT KG/PALLET	APPROX. WEIGHT TONNE/CONT.	APPROX. SQM/CONT.	APPROX. BOX/CONT.
SRKI	Rectified	120x60	2	1,44	39,7	36	10	1454	20,7	734	510
						15	10	621			
SRKI	Rectified	60x60	3	1,08	23,0	40	25	945	23,6	1080	1000
RCI	Rectified	60x60	3	1,08	23,0	40	25	945	23,6	1080	1000
SRKI	Rectified	60x30	6	1,08	23,0	40	25	945	23,6	1080	1000
SRKI	Rectified	30x30	12	1,08	23,1	50	20	1180	23,6	1080	1000

- Packing information may vary depending on spesification of each motif and size.
- The colors illustrated in this brocure are produces near to actual colors.