



W93455R
dOrtensia Bianco
30x90 - Gol. A



W93755R
dOrtensia Aurea
30x90 - Gol. B




W93456R
dOrtensia Nero
30x90 - Gol. B



W93756R
dOrtensia Portoro
30x90 - Gol. C

ENDMATCH

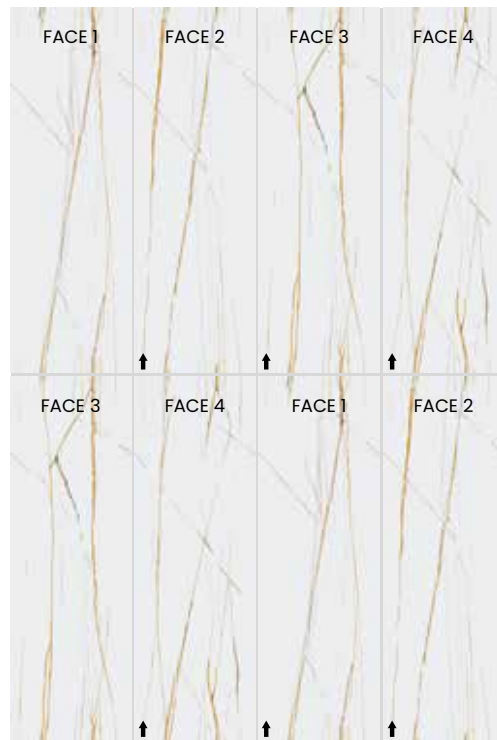

*The vein can continuously connect to all sides (left, right, top, bottom) to form **endmatch** pattern regardless if the faces are randomly installed (interchanged among the faces).



Rectificado SLIM 30x90 cm
Wall Tiles Glossy



dOrtensia

ENDMATCH




* Matching Floor : dHollywood Vanilla 60x60cm.

Shade Variations



Shade variations are the characteristic of the tile that deliberate and visible differences in graphics and colour hue. Digital Tecnica technology creates stunning ceramic tiles with hyper-realistic surface tones, markings and textures which mimic a range of natural materials including; stone, timber, terracotta, cement, mosaic, marble and more.

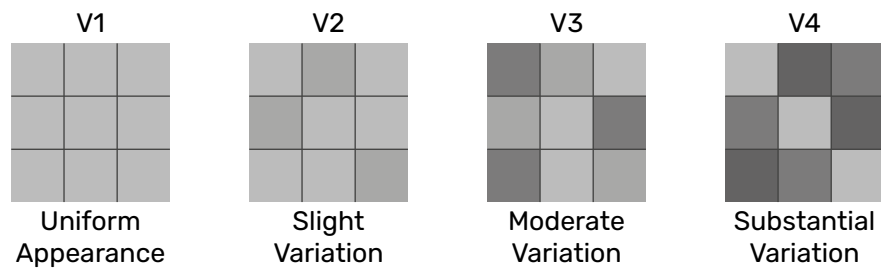

V1 (Uniform Appearance)

Differences among pieces from the same production run are minimal.

Austin White
50x50



V2 (Slight Variation)

Clearly distinguishable differences in texture and/or pattern within similar colors.


dCervino Bone
50x50



V3 (Moderate Variation)

Amount and intensity of colors on each piece may vary significantly.

dTimber Brown
50x50



V4 (Substantial Variation)

Random color differences each tile, so that one tile may have totally different colors from other tiles.

dBudapest Vintage
50x50

Packaging Information





| FACTORY | SIZE (CM) | PCS/BOX | APPROX. SQM/BOX | APPROX. WEIGHT/BOX (KG) | BOXES/PALLET | PALLETS/CONTAINER | APPROX. WEIGHT/PALLET (KG) | BOXES/CONTAINER | APPROX. GROSS WEIGHT/CONTAINER (TONNE) | APPROX. SQM/CONTAINER |
|------------------|-----------|---------|-----------------|-------------------------|--------------|-------------------|----------------------------|-----------------|--|-----------------------|
| RECTIFICADO WALL | | | | | | | | | | |
| SRKI | 30x90 | 4 | 1.08 | 19.4 | 54 | 20 | 1073 | 1080 | 21.5 | 1166 |

NOTE :

- Packing information may vary depending on specification of each motive and size.
- The colours illustrated in this brochure are produced near to actual colours.

Technical Specification



| TECHNICAL CHARACTERISTIC | TEST METHOD OR AS PER NORM | FLOOR TILE | | WALL TILE | |
|-----------------------------------|----------------------------|--------------------------------------|--|------------------------|---|
| | | ISO 13006 REQUIREMENT |  | ISO 13006 REQUIREMENT |  |
| Length and Width | ISO 10545 - 2 | ± 0.6 % | ± 0.4 % | ± 0.5 % | ± 0.4 % |
| Side Straightness | ISO 10545 - 2 | ± 0.5 % | ± 0.3 % | ± 0.3 % | ± 0.3 % |
| Rectangularity | ISO 10545 - 2 | ± 0.6 % | ± 0.4 % | ± 0.5 % | ± 0.4 % |
| Center Curvature & Edge Curvature | ISO 10545 - 2 | ± 0.5 % | - 0.15 % to + 0.25 % | - 0.3 % to + 0.5 % | - 0.15 % to + 0.25 % |
| Warpage | ISO 10545 - 2 | ± 0.5 % | ± 0.3 % | ± 0.5 % | ± 0.3 % |
| Thickness | ISO 10545 - 2 | ± 5.0 % | ± 4.0 % | ± 10 % | ± 3.0 % |
| Water Absorption | ISO 10545 - 3 | B1b ≤ 3.0 % | B1 < 3.0 % | B3 > 10 % | B3 Less than 18 % |
| Modulus of Rupture | ISO 10545 - 4 | B1b 30 Ind. Min. 27N/mm ² | ≥ 35 N/mm ² | ≥ 15 N/mm ² | ≥ 17 N/mm ² |
| Crazing Resistance | ISO 10545 -11 | Required | Resistant | Required | Resistant |
| Chemical Resistance | ISO 10545 - 13 | Minimum Class GB | Minimum Class GB | Minimum Class GB | Minimum Class GB |
| Stain Resistance | ISO 10545 - 14 | Minimum Class 3 | Minimum Class 4 | Minimum Class 3 | Minimum Class 5 |
| Abrasion Resistance | ISO 10545 - 7 | Group I to V | Group III to V | Not Required | Not Required |

NOTE :

- The governing sizes and weights are subject to the usual variations expected of fired ceramic productions.
- Slight variations of shades/colours and surface finishes are inherent due to the nature of ceramic tile production process.