




V2

Precut dPacific Mix / Precut dPacific Navy


dPacific

Wall Tiles


30x30 cm
Glossy



PWA33711
Precut dPacific Sky*
30 x 30 - Gol. B



PWA33713
Precut dPacific Mix*
30 x 30 - Gol. B




PWA33712
Precut dPacific Navy*
30 x 30 - Gol. B

* For the best mosaic effect, it is suggested to fill pre cut groove with grouts.

Shade Variations




Shade variations are the characteristic of the tile that deliberate and visible differences in graphics and colour hue. Digital Tecnica technology creates stunning ceramic tiles with hyper-realistic surface tones, markings and textures which mimic a range of natural materials including; stone, timber, terracotta, cement, mosaic, marble and more.

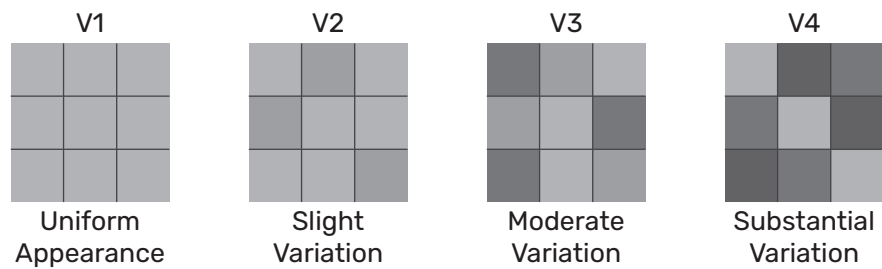

Austin White
50x50

V1 (Uniform Appearance)
Differences among pieces from the same production run are minimal.




dCervino Bone
50x50

V2 (Slight Variation)
Clearly distinguishable differences in texture and/or pattern within similar colors.



dTimber Brown
50x50

V3 (Moderate Variation)
Amount and intensity of colors on each piece may vary significantly.



dBudapest Vintage
50x50

V4 (Substantial Variation)
Random color differences each tile, so that one tile may have totally different colors from other tiles.

Packaging Information





FACTORY	SIZE (CM)	PCS/BOX	APPROX. SQM/BOX	APPROX. WEIGHT/ BOX (KG)	BOXES/ PALLET	PALLETS/ CONTAINER	APPROX. WEIGHT/ PALLET (KG)	BOXES/ CONTAINER	APPROX. GROSS WEIGHT/ CONTAINER (TONNE)	APPROX. SQM/ CONTAINER
WALL TILES										
SRKI	30x60	6	1.08	18.1	72	18	1328	1296	23.9	1400
SRKI	25x50	8	1	15.7	80	19	1281	1520	24.3	1520
SRKI	20x40	12	0.96	13.2	120	15	1609	1800	24.1	1728
SRKI	Pre Cut 30x30	11	0.99	16.5	54	26	918	1404	23.9	1390
SRKI	30x30	11	0.99	17	81	17	1403	1377	23.8	1363
SRKI	25x25	16	1	14.5	112	14	1649	1568	23.1	1568

NOTE :

- Packing information may vary depending on specification of each motive and size.
- The colours illustrated in this brochure are produced near to actual colours.

Technical Specification



TECHNICAL CHARACTERISTIC	TEST METHOD OR AS PER NORM	FLOOR TILE		WALL TILE	
		ISO 13006 REQUIREMENT		ISO 13006 REQUIREMENT	
Length and Width	ISO 10545 - 2	± 0.6 %	± 0.4 %	± 0.5 %	± 0.4 %
Side Straightness	ISO 10545 - 2	± 0.5 %	± 0.3 %	± 0.3 %	± 0.3 %
Rectangularity	ISO 10545 - 2	± 0.6 %	± 0.4 %	± 0.5 %	± 0.4 %
Center Curvature & Edge Curvature	ISO 10545 - 2	± 0.5 %	- 0.15 % to + 0.25 %	- 0.3 % to + 0.5 %	- 0.15 % to + 0.25 %
Warpage	ISO 10545 - 2	± 0.5 %	± 0.3 %	± 0.5 %	± 0.3 %
Thickness	ISO 10545 - 2	± 5.0 %	± 4.0 %	± 10 %	± 3.0 %
Water Absorption	ISO 10545 - 3	B1b ≤ 3.0 %	B1 < 3.0 %	B3 > 10 %	B3 Less than 18 %
Modulus of Rupture	ISO 10545 - 4	B1b 30 Ind. Min. 27N/mm ²	≥ 35 N/mm ²	≥ 15 N/mm ²	≥ 17 N/mm ²
Crazing Resistance	ISO 10545 -11	Required	Resistant	Required	Resistant
Chemical Resistance	ISO 10545 - 13	Minimum Class GB	Minimum Class GB	Minimum Class GB	Minimum Class GB
Stain Resistance	ISO 10545 - 14	Minimum Class 3	Minimum Class 4	Minimum Class 3	Minimum Class 5
Abrasion Resistance	ISO 10545 - 7	Group I to V	Group III to V	Not Required	Not Required

NOTE :

- The governing sizes and weights are subject to the usual variations expected of fired ceramic productions.
- Slight variations of shades/colours and surface finishes are inherent due to the nature of ceramic tile production process.